



AAUnet topologi

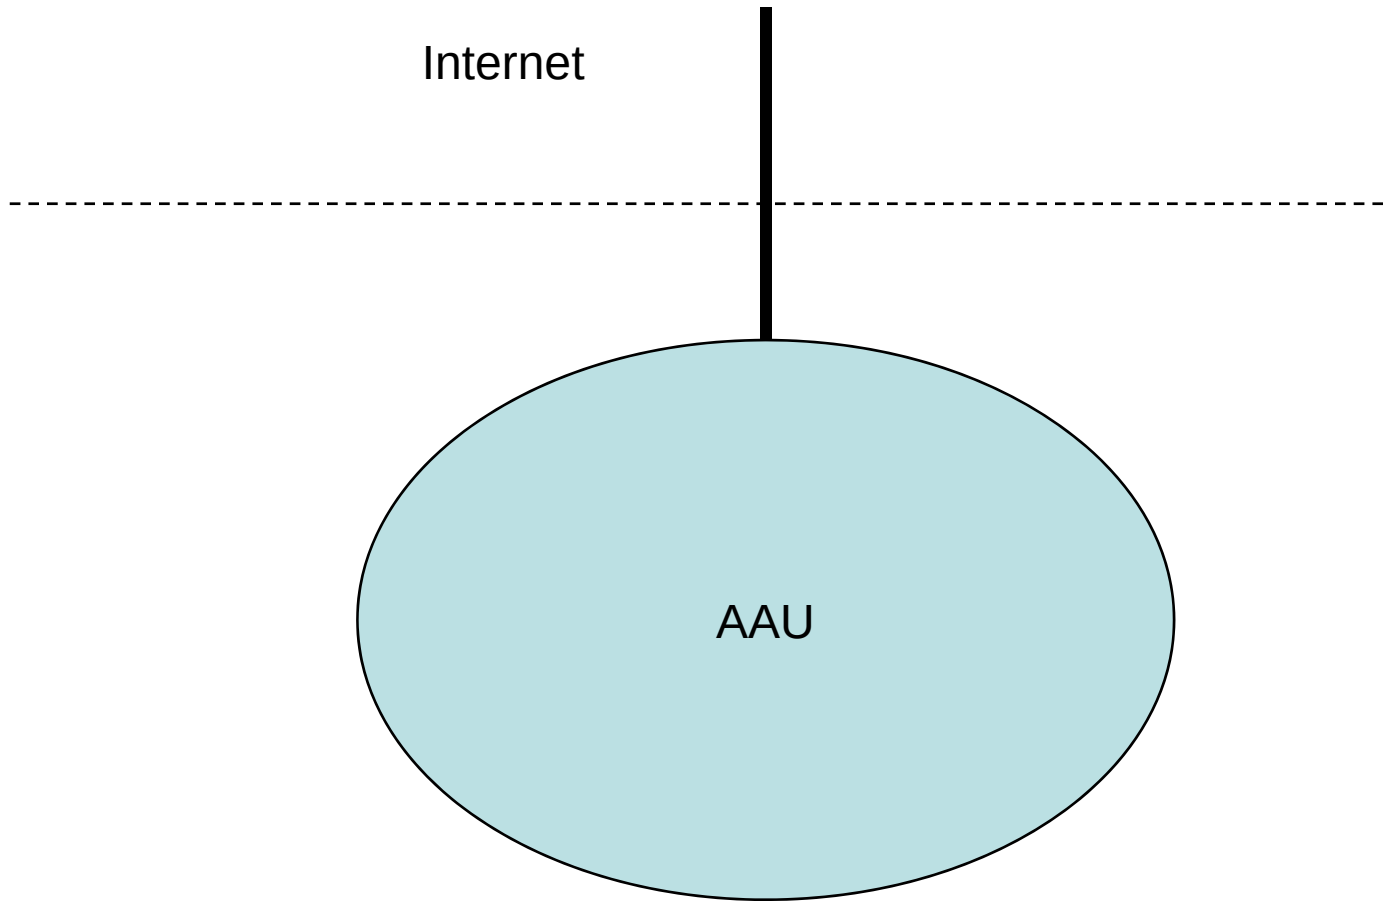


2008-02-07

SAI/WAP

AAUnet topologi

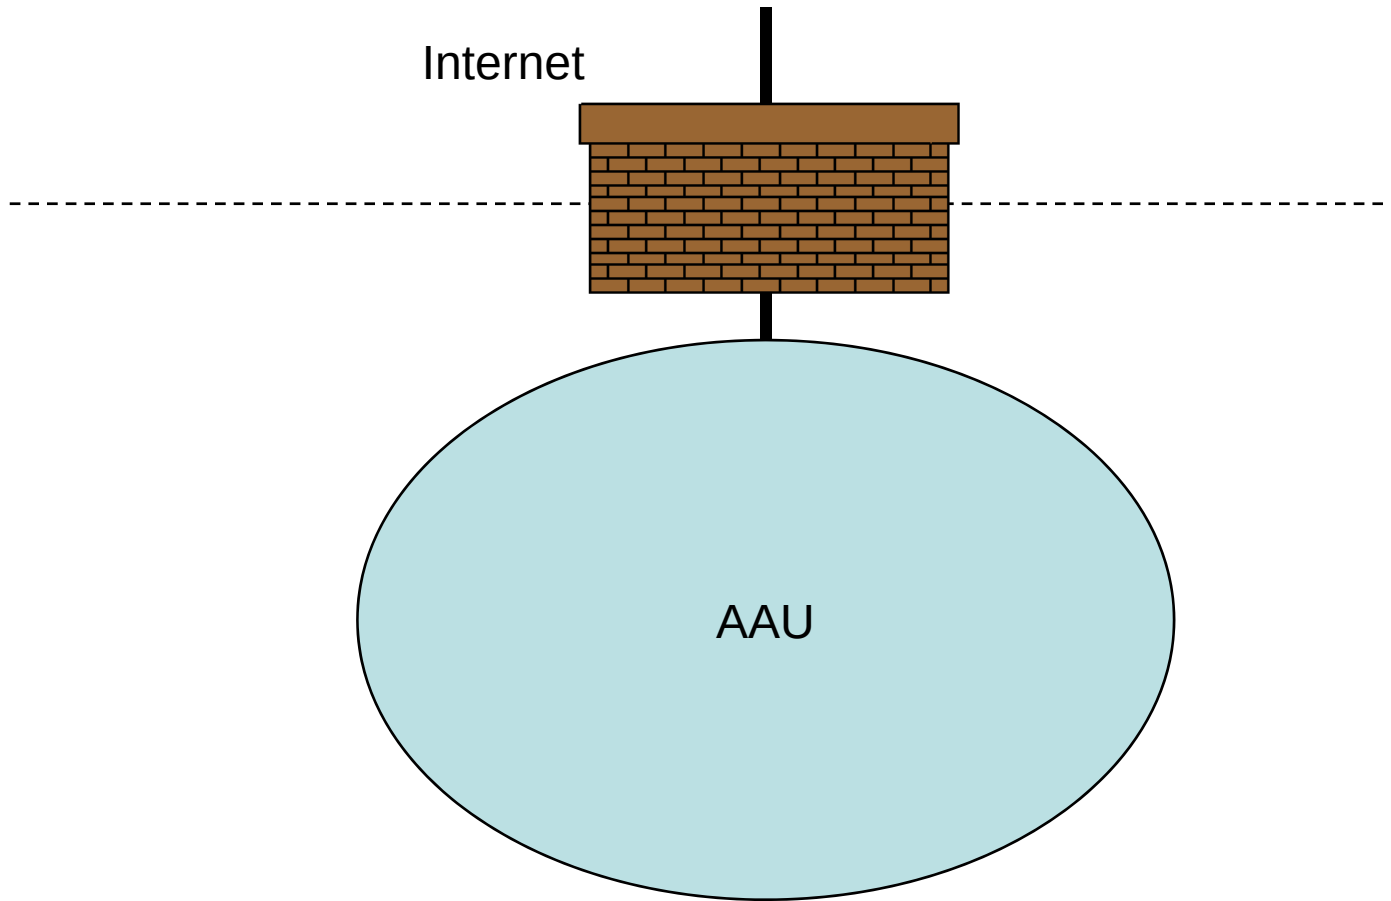


AAUnet topologi

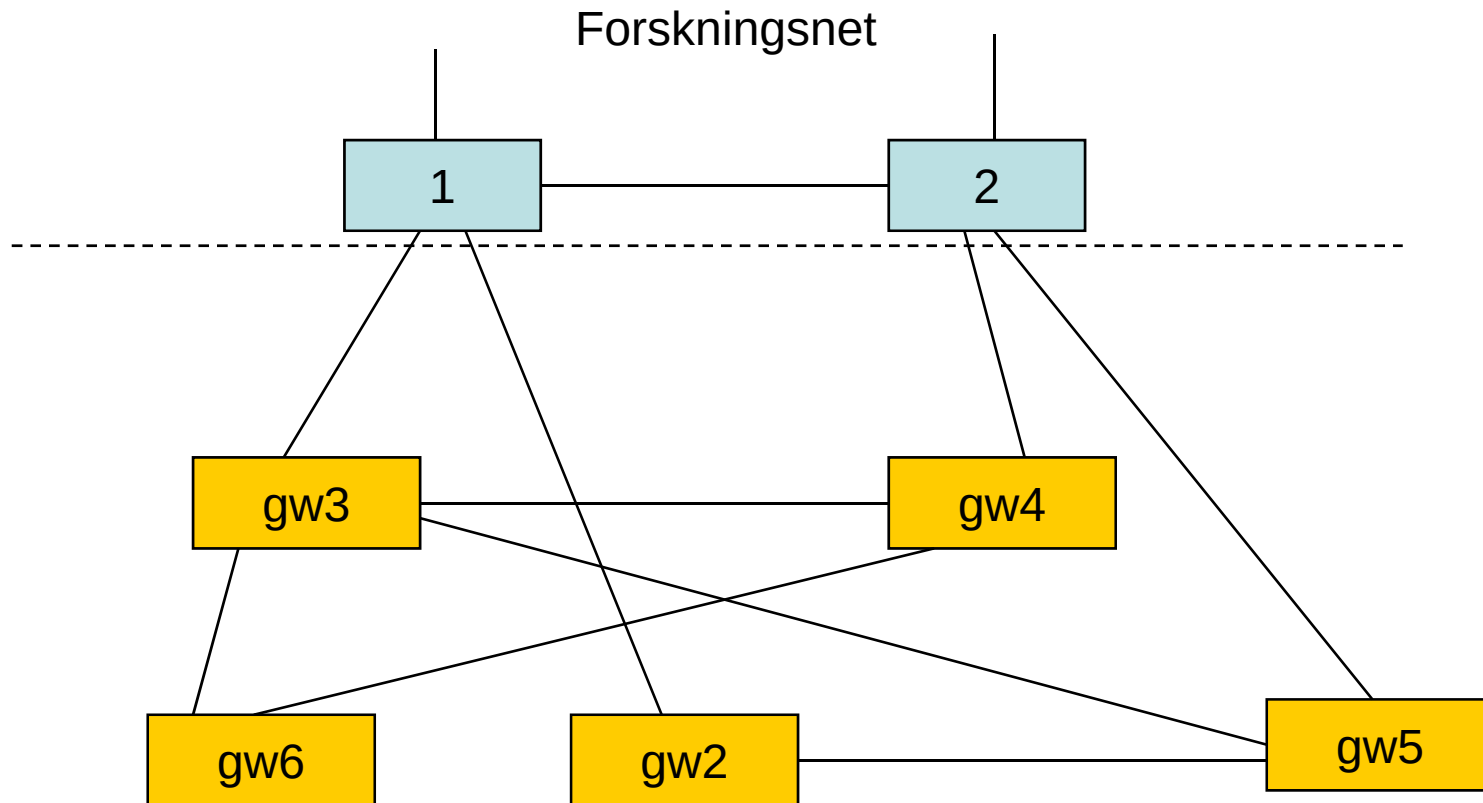


- AAU/CS topology
- Campus design
- Security problems
- CS vlan190 filter
- Mail-virus

Topologi-services-politics

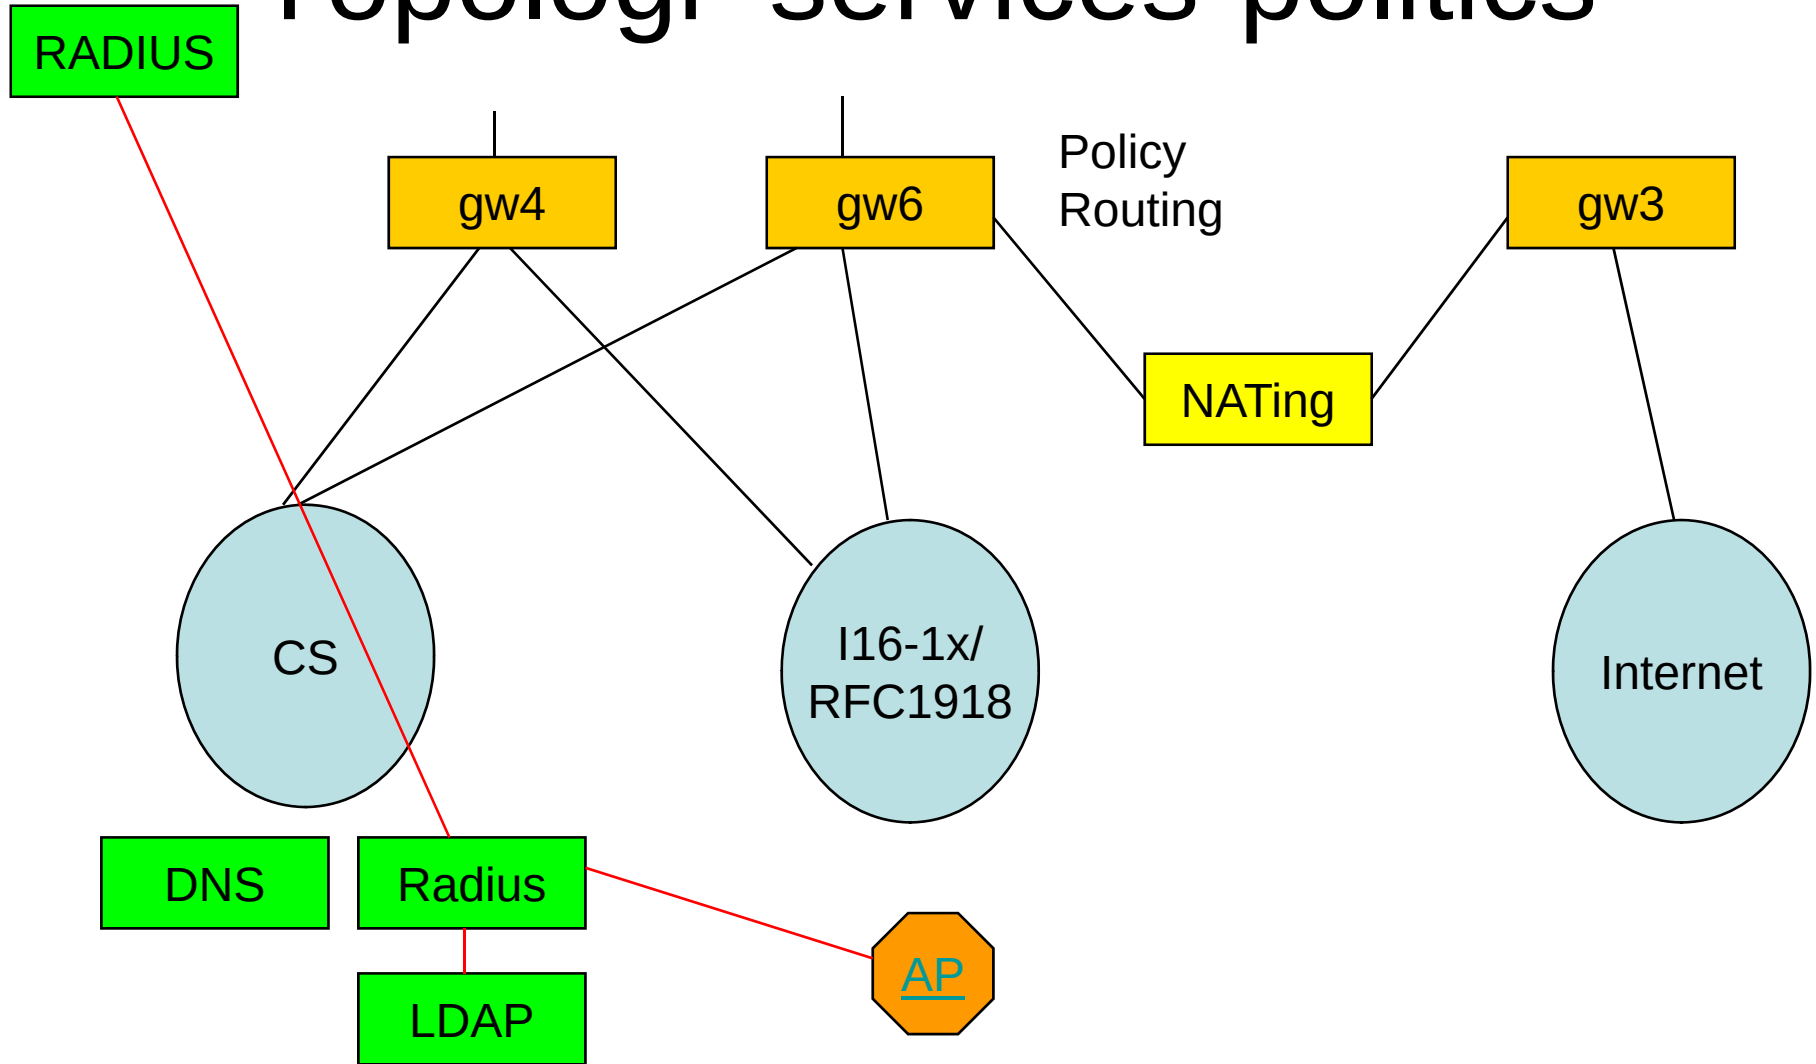

SW6net topologi

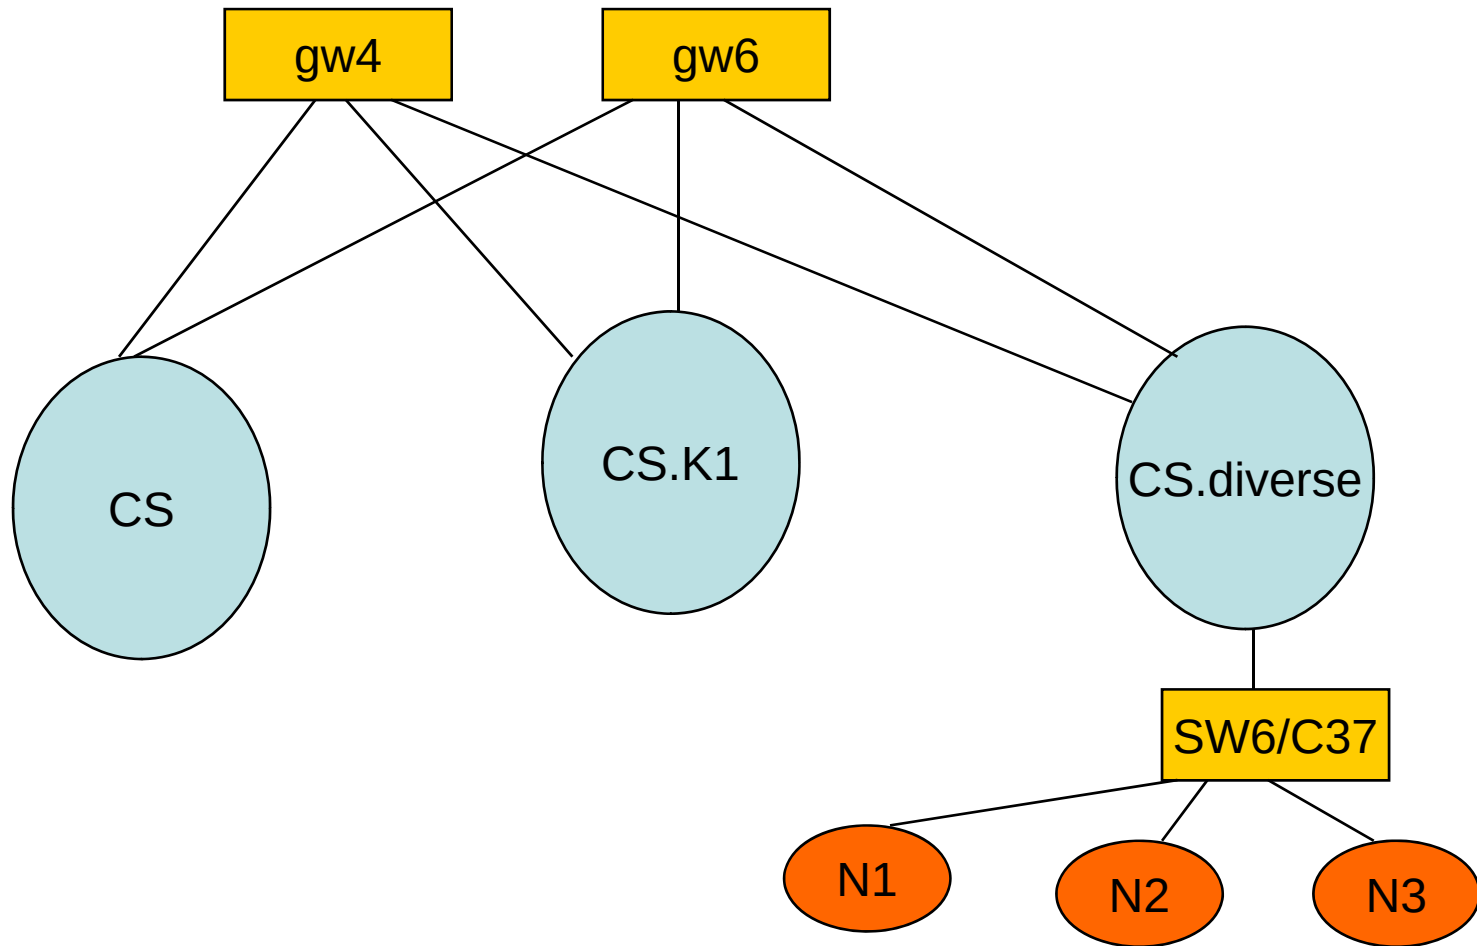

SW6 router

- Passwords:

Telnet: "SW6,2007F"

Enable "sw6,2007f"

- IP address: 192.168.194.250
(Netmask 255.255.255.0)

- [sw6_conf](#)

Subnetting

IP addresser: N3 192.168.26.25 netmask 255.255.255.248

24	...1 1	000	
25	...1 1	001	# default router
26	...1 1	010	
....			
30	... 1 1	110	
31	... 1 1	111	# broadcast


N1: 192.168.26.1-6 N2: 192.168.26.9-14

DNS : gw.sw6.cs.aau.dk h1.sw6.cs.aau.dk

group	IP sequence 192.168.26.x	Switch Port FastEthernet	Rum socket
S601a 2.1.01	1-6 9-14 (Vlan0005)	0/1 0/2	F32 G01
		0/3 0/4	G02
S601b 2.1.03	17-22 25-30	0/5 0/6	G09 G10
		0/7 0/8	G11
S601c 2.1.05	33-38 41-46	0/9 0/10	G18 G19
		0/11 0/12	G20 G21

group	IP sequence 192.168.26.x	Switch Port FastEthernet	Rum socket
S601d 2.1.10	49-54 57-62	0/13 0/14	G27 G28
		0/15 0/16	G29 G30
S601e 2.1.46	65-70 73-80	0/17 0/18	F23 F24
		0/19 0/20	F25
Uplink Do not touch	192.168.194.25	0/24	

Routing til SW6net

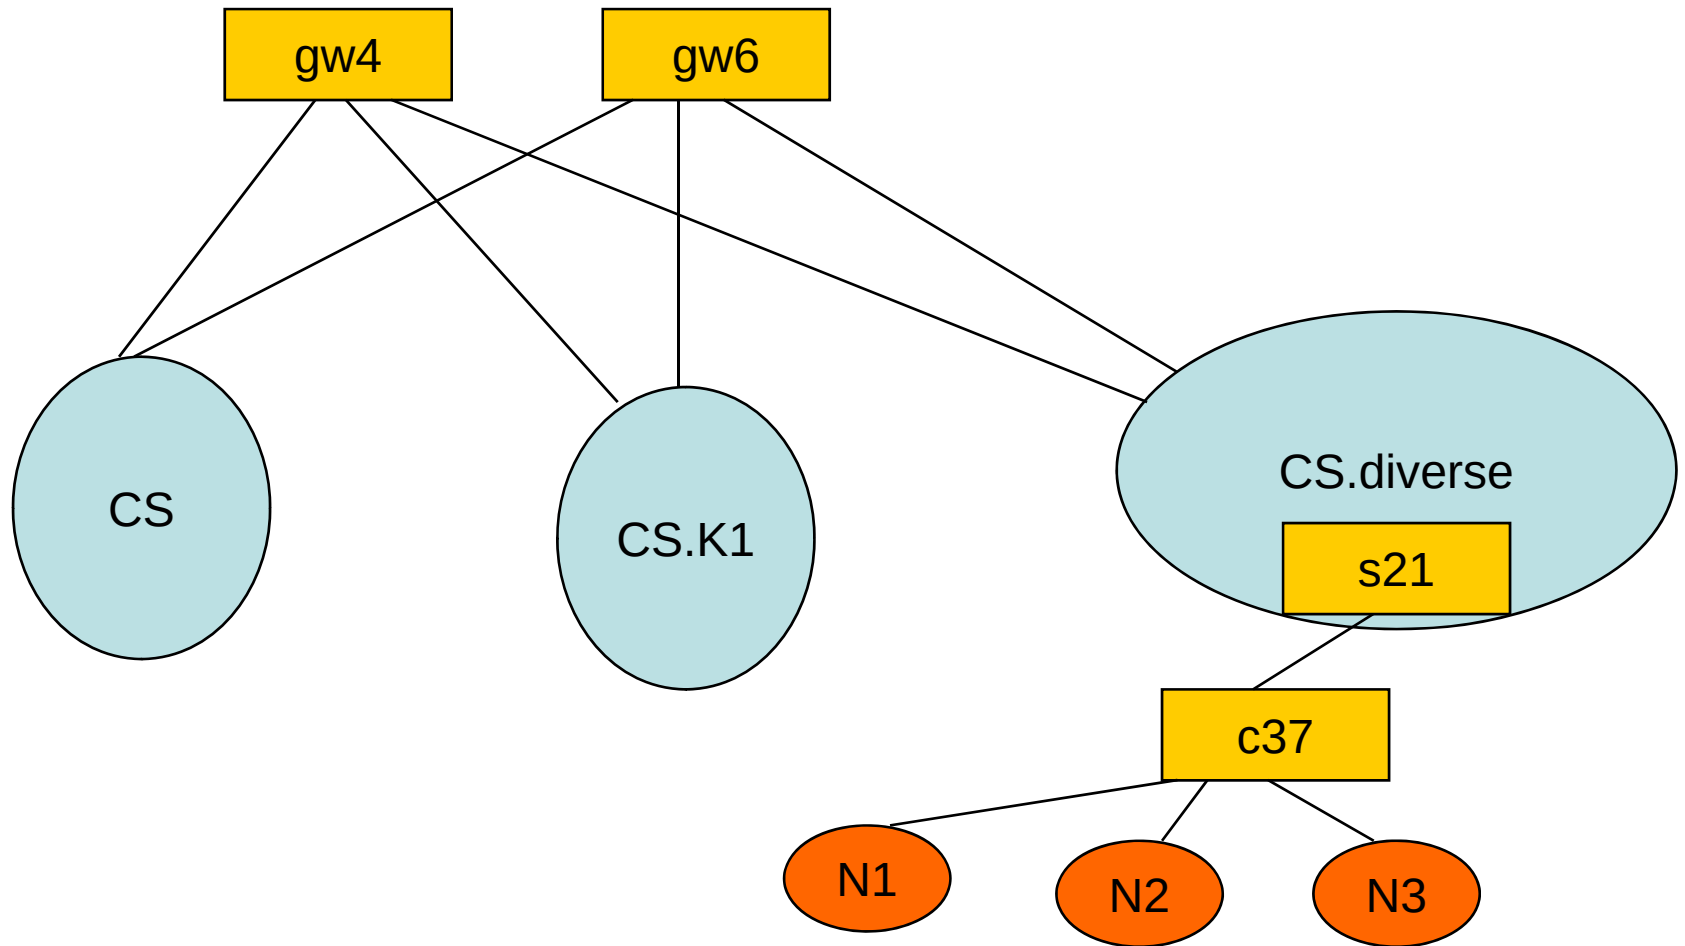

Routing til SW6

